



F-11Z-K-PP

1.000 - 2.000 l/h Cartridge


Typical applications
Plating and process industry

Features

- Compact and robust, service friendly
- Filter chamber with welded bottom (no seal) or carbon cartridge (max. Ø 70mm)
- All PP or PVDF construction
- Max. temperature PP 80°C / PVDF 100°C
- Unions for rigid piping (PP, PVDF or CPVC sockets)

Options

- Hose connection
- (Contact) manometer
- Single open end cartridge
- Customised mounting plate



F-11H-K-PP




F-11A-K-PP

FIT-11Z-K-PP



Filter chambers F11/12 PP/PVDF

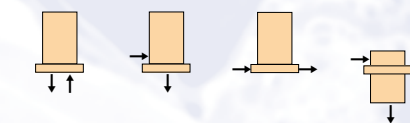

F		FIT	Medium	Material	In	Out
11A/12A	11Z/12Z	11H/12H	11Z/12Z	K	PP/PVDF	d20/DN15

Selection: F - 11Z - K - PP

www.hendor.com

maximum pressure				
°C	°F	Mpa	bar	psi
20	68	0,35	3,5	50
55	131	0,35	3,5	50
80	176	0,25	2,5	36

K = cartridges
Qty x L
11-K = 1 x 10"
12-K = 1 x 20"