



10.000 - 25.000 l/h Discs, cartridges, bag

Typical applications
Plating and process industry


Features

- Compact and robust, service friendly
- Filter chamber with welded bottom (no seal)
- Discs (thin/thick paper, cloth), cartridges (max. Ø 69mm) or pleated bag
- All PP construction
- Top plate made of glass-filled PP
- Max. temperature PP 80°C
- External fasteners in SS316
- Unions for rigid piping (PP or CPVC sockets)


Options

- Hose connection
- Contact manometer
- Single open end cartridges
- Customised mounting plate
- Four PP legs (standard 300mm)
- External fasteners in titanium or electroless nickel coated

F-151A-P-PP



Filter chambers F151/152 PP

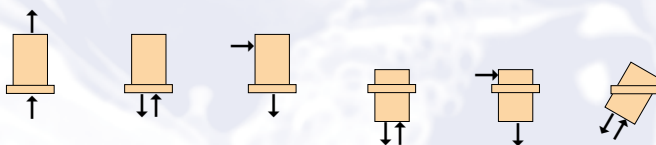

F			FIT (in tank)			Medium	Material	In	Out
151/152	151A/152A	151Z/152Z	151A/152A	151Z/152Z	151L/152L	K/P/D/PC	PP	d50/DN40	

Selection: FIT - 151A - K - PP

K = cartridges

Qty x L
151-K = 15 x 10"
152-K = 15 x 20"

P = discs

Qty	OD/ID	m ²
151-P = 37(32) x 280/50	2,2(1,9)	
152-P = 69(63) x 280/50	4,1(3,8)	

D = pleated bag^{*)}

L	m ²
151-D = 10"	1,3
152-D = 20"	2,4

PC = discs + carbon bag

151-PC = 10 discs + carbon bag (15L)
152-PC = 37 discs + carbon bag (30L)

www.hendor.com

standard maximum pressure				
°C	°F	Mpa	bar	psi
20	68	0,35	3,5	50
55	131	0,35	3,5	50
80	176	0,25	2,5	36

option high pressure model				
°C	°F	Mpa	bar	psi
20	68	0,55	5,5	80
50	122	0,55	5,5	80
80	176	0,25	2,5	36

^{*)} For filter chambers with GAF-type filter bags, see separate leaflet